

# Blackbox optimization with the MADS algorithm and the NOMAD software

Sébastien Le Digabel



**POLYTECHNIQUE  
MONTREAL**  
TECHNOLOGICAL  
UNIVERSITY

ROADEF Tutorial, 2021-04-27

## Contributors and partners



# Research team


Professors (SLD and C. Audet)

---



Research associates (V. Rochon Montplaisir and C. Tribes)

---



Postdocs / Students



Graduates

---



# Presentation outline

Introduction

The MADS algorithm

The NOMAD software package

Example: Hyperparameters Optimization

References

## Introduction

The MADS algorithm

The NOMAD software package

Example: Hyperparameters Optimization


References

## Blackbox / Derivative-Free Optimization

We consider

$$\min_{x \in \Omega} f(x)$$

where the evaluations of  $f$  and the functions defining  $\Omega$  are the result of a computer simulation (a **blackbox**)




- ▶ Each call to the simulation may be expensive
- ▶ The simulation can fail
- ▶ Sometimes  $f(x) \neq f(x)$
- ▶ Derivatives are not available and cannot be approximated


## Blackboxes as illustrated by a Boeing engineer



Long runtime




Large memory requirement



Software might fail



No derivatives available



Local optima



Non-smooth, noisy

## Example


The SOLAR problem:

<https://github.com/bbopt/solar>




## Terms

- ▶ “*Derivative-Free Optimization (DFO)* is the mathematical study of optimization algorithms that do not use derivatives” [Audet and Hare, 2017]
  - ▶ Optimization without using derivatives
  - ▶ Derivatives may exist but are not available
  - ▶ Obj./constraints may be analytical or given by a blackbox
  
- ▶ “*Blackbox Optimization (BBO)* is the study of design and analysis of algorithms that assume the objective and/or constraints functions are given by blackboxes” [Audet and Hare, 2017]
  - ▶ A simulation, or a blackbox, is involved
  - ▶ Obj./constraints may be analytical functions of the outputs
  - ▶ Derivatives may be available (ex.: PDEs)
  - ▶ Sometimes referred as *Simulation-Based Optimization (SBO)*



# Optimization: Global view

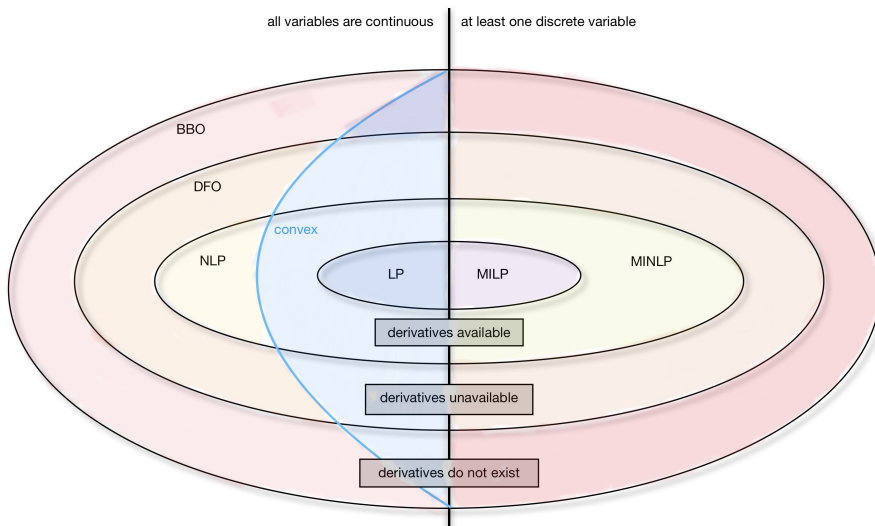

Introduction


**The MADS algorithm**

The NOMAD software package

Example: Hyperparameters Optimization

References

## Typical setting

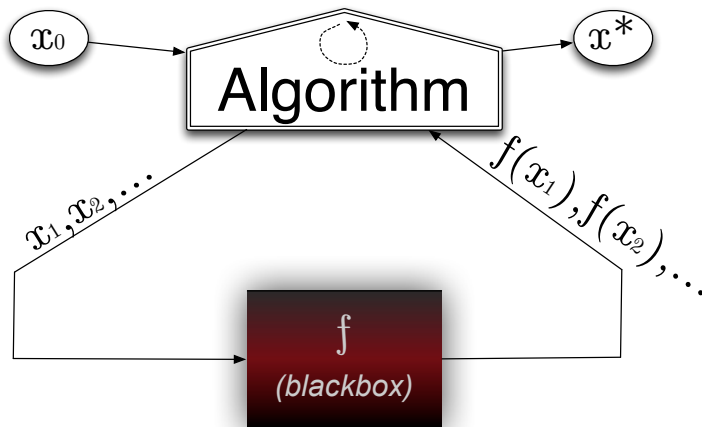

Unconstrained case, with one initial starting solution

## Algorithms for blackbox optimization

A method for blackbox optimization should ideally:

- ▶ Be efficient given a **limited budget of evaluations**
- ▶ Be **robust** to noise and blackbox failures
- ▶ Natively handle **general constraints**
- ▶ Have **convergence properties** ensuring first-order local optimality in the smooth case – otherwise why using it on more complicated problems?
- ▶ Easily exploit **parallelism**
- ▶ Deal with **multiobjective optimization**
- ▶ Deal with **integer and categorical variables**
- ▶ Have a publicly available **implementation**

## Families of methods

- ▶ “*Computer science*” methods:
  - ▶ Heuristics such as genetic algorithms
  - ▶ No convergence properties
  - ▶ Cost a **lot** of evaluations
  - ▶ Should be used only in **last resort** for desperate cases
  
- ▶ Statistical methods:
  - ▶ Design of experiments – out of date compared to modern DFO methods
  - ▶ Bayesian optimization: EGO algorithm based on **surrogates** and **expected improvement**
  - ▶ Still limited in terms of dimension
  - ▶ Does not natively handle constraints
  - ▶ Better to use these tools in conjunction with DFO methods
  
- ▶ **Derivative-Free Optimization methods (DFO)**

## DFO methods

### ▶ Model-based methods:

- ▶ Derivative-Free Trust-Region (DFTR) methods.
- ▶ Based on quadratic models or radial-basis functions
- ▶ Use of a trust-region
- ▶ Better for { DFO \ BBO }
- ▶ Not resilient to noise and *hidden constraints*
- ▶ Not easy to parallelize

### ▶ Direct-search methods:

- ▶ Classical methods: Coordinate search, Nelder-Mead – the *other* simplex method
- ▶ Modern methods: Generalized Pattern Search (GPS), Generating Set Search (GSS),  
Mesh Adaptive Direct Search (MADS)

So far, the size of the instances (variables and constraints) is typically limited to  $\simeq 50$ , and we target local optimization

**[0] Initializations** ( $x_0, \Delta_0$ )

**[1] Iteration**  $k$

**[1.1] Search**

select a finite number of **mesh** points  
 evaluate candidates opportunistically

**[1.2] Poll** (if Search failed)

construct poll set  $P_k = \{x_k + \Delta_k d : d \in D_k\}$   
 sort( $P_k$ )  
 evaluate candidates opportunistically

**[2] Updates**

if success

$x_{k+1} \leftarrow$  success point  
 increase  $\Delta_k$

else

$x_{k+1} \leftarrow x_k$   
 decrease  $\Delta_k$


$k \leftarrow k + 1$ , stop or go to **[1]**

The MADS algorithm [Audet and Dennis, Jr., 2006]



## MADS illustration with $n = 2$ : Poll step


$$\Delta_k^m = \Delta_k^p = 1$$



poll trial points =  $\{t_1, t_2, t_3\}$

## MADS illustration with $n = 2$ : Poll step


$$\Delta_k^m = \Delta_k^p = 1$$



poll trial points =  $\{t_1, t_2, t_3\}$

$$\Delta_{k+1}^m = 1/4$$


$$\Delta_{k+1}^p = 1/2$$



=  $\{t_4, t_5, t_6\}$

## MADS illustration with $n = 2$ : Poll step


$$\Delta_k^m = \Delta_k^p = 1$$



poll trial points =  $\{t_1, t_2, t_3\}$

$$\Delta_{k+1}^m = 1/4$$


$$\Delta_{k+1}^p = 1/2$$



=  $\{t_4, t_5, t_6\}$

$$\Delta_{k+2}^m = 1/16$$

$$\Delta_{k+2}^p = 1/4$$



=  $\{t_7, t_8, t_9\}$

## Special features of MADS

- ▶ **Constraints** handling with the Progressive Barrier technique [Audet and Dennis, Jr., 2009]
- ▶ **Surrogates** [Talgorn et al., 2015]
- ▶ **Categorical variables** [Abramson, 2004]
- ▶ **Granular and discrete variables** [Audet et al., 2019]
- ▶ **Global optimization** [Audet et al., 2008a]
- ▶ **Parallelism** [Le Digabel et al., 2010, Audet et al., 2008b]
- ▶ **Multiobjective optimization** [Audet et al., 2008c]
- ▶ **Sensitivity analysis** [Audet et al., 2012]
- ▶ **Handling of stochastic blackboxes** [Alarie et al., 2019, Audet et al., 2021a]

Introduction

The MADS algorithm

**The NOMAD software package**

Example: Hyperparameters Optimization

References

## NOMAD (Nonlinear Optimization with MADS)



- ▶ C++ implementation of the MADS algorithm [Audet and Dennis, Jr., 2006]
- ▶ Standard C++. Runs on Linux, Mac OS X and Windows
- ▶ Parallel versions with MPI
- ▶ MATLAB versions; Multiple interfaces (Python, Excel, etc.)
- ▶ Open and free – LGPL license
- ▶ Download at <https://www.gerad.ca/nomad>
- ▶ Support at [nomad@gerad.ca](mailto:nomad@gerad.ca)
  
- ▶ Related article in TOMS [Le Digabel, 2011] (WoS Highly Cited Paper), and [Audet et al., 2021b]



## NOMAD: History and team

- ▶ Developed since 2000
- ▶ Current versions: 3.9 (June 2018) and 4.0.2 (April 2021)
- ▶ Algorithm designers, developers:
  - ▶ M. Abramson, C. Audet, G. Couture, J. Dennis, S. Le Digabel, V. Rochon-Montplaisir, C. Tribes
- ▶ Developers:
  - ▶ Versions 1 and 2: G. Couture
  - ▶ **Version 3 (2008)**: S. Le Digabel, C. Tribes
  - ▶ **Version 4 (2021)**: V. Rochon-Montplaisir, C. Tribes

≈12,000 certified downloads since 2008

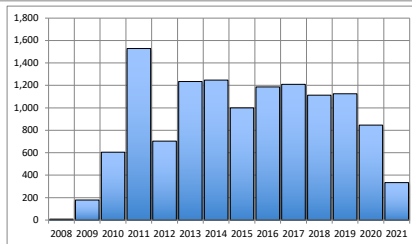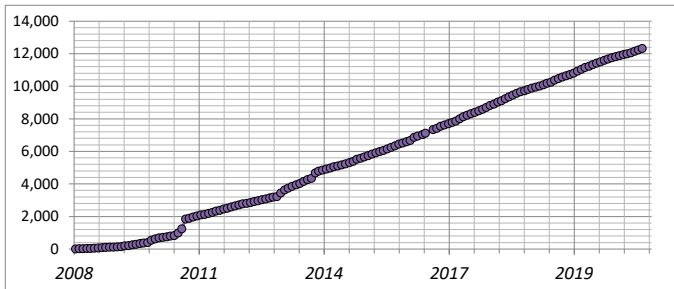



## Main functionalities (1/2)

- ▶ Single or biobjective optimization
- ▶ Variables:
  - ▶ Continuous, integer, binary, categorical, granular
  - ▶ Periodic
  - ▶ Fixed
  - ▶ Groups of variables
- ▶ Searches:
  - ▶ Latin-Hypercube
  - ▶ Variable Neighborhood Search
  - ▶ Nelder-Mead Search
  - ▶ Quadratic models
  - ▶ Statistical surrogates
  - ▶ User search

## Main functionalities (2/2)

- ▶ Constraints treated with 4 different methods:
  - ▶ Progressive Barrier (default)
  - ▶ Extreme Barrier
  - ▶ Progressive-to-Extreme Barrier
  - ▶ Filter method
- ▶ Several direction types:
  - ▶ Coordinate directions
  - ▶ LT-MADS
  - ▶ OrthoMADS
  - ▶ Hybrid combinations
- ▶ Sensitivity analysis

(all items correspond to published or submitted papers)

## Blackbox conception (batch mode)

- ▶ Command-line program that takes in argument a file containing  $x$ , and displays the values of  $f(x)$  and the  $c_j(x)$ 's
- ▶ Can be coded in any language
- ▶ Typically: `> bb.exe x.txt` displays `f c1 c2` (objective and two constraints)

# Run NOMAD

```
> nomad parameters.txt
```

```
[iota ~/Desktop/2018_UQAC_NOMAD/demo_NOMAD/mac] > ../nomad.3.8.1/bin/nomad parameters.txt
NOMAD - version 3.8.1 has been created by {
Charles Audet - Ecole Polytechnique de Montreal
Sebastien Le Digabel - Ecole Polytechnique de Montreal
Christophe Tribes - Ecole Polytechnique de Montreal
}

The copyright of NOMAD - version 3.8.1 is owned by {
Sebastien Le Digabel - Ecole Polytechnique de Montreal
Christophe Tribes - Ecole Polytechnique de Montreal
}

NOMAD v3 has been funded by AFOSR, Exxon Mobil, Hydro Québec, Rio Tinto and
IVADO.

NOMAD v3 is a new version of NOMAD v1 and v2. NOMAD v1 and v2 were created
and developed by Mark Abramson, Charles Audet, Gilles Couture, and John E.
Dennis Jr., and were funded by AFOSR and Exxon Mobil.

License : '$NOMAD_HOME/src/lqpl.txt'
User guide: '$NOMAD_HOME/doc/user_guide.pdf'
Examples : '$NOMAD_HOME/examples'
Tools : '$NOMAD_HOME/tools'

Please report bugs to nomad@gerad.ca

Seed: 0

MADS run {

      BBE      OBJ

      4      0.0000000000
      21     -1.0000000000
      23     -3.0000000000
      51     -4.0000000000
      563    -4.0000000000

} end of run (mesh size reached NOMAD precision)

blackbox evaluations : 563
best infeasible solution (min. violation): ( 1.000000013 1.000000048 0.9999999797 0.999999992 -4 ) h=1.10134e-13 f=-4
best feasible solution : ( 1 1 1 -4 ) h=0 f=-4
```

## Example

NOMAD on The SOLAR problem:  
<https://github.com/bbopt/solar>

Introduction

The MADS algorithm

The NOMAD software package


**Example: Hyperparameters Optimization**

References

## HPO with HyperNOMAD

- ▶ PhD project of [Dounia Lakhmiri](#)
- ▶ Accepted article in TOMS [Lakhmiri et al., 2021]
- ▶ We focus on the HPO of deep neural networks
- ▶ Our advantages:
  - ▶ Blackbox optimization problem:  
*One blackbox call = Training + validation + test, for a fixed set of hyperparameters*
  - ▶ Presence of categorical variables (*ex.: number of layers*)
  - ▶ Existing methods are mostly heuristics  
*(grid search, random search, GAs, etc.)*
- ▶ Based on the [NOMAD](#) implementation of MADS

# Principle

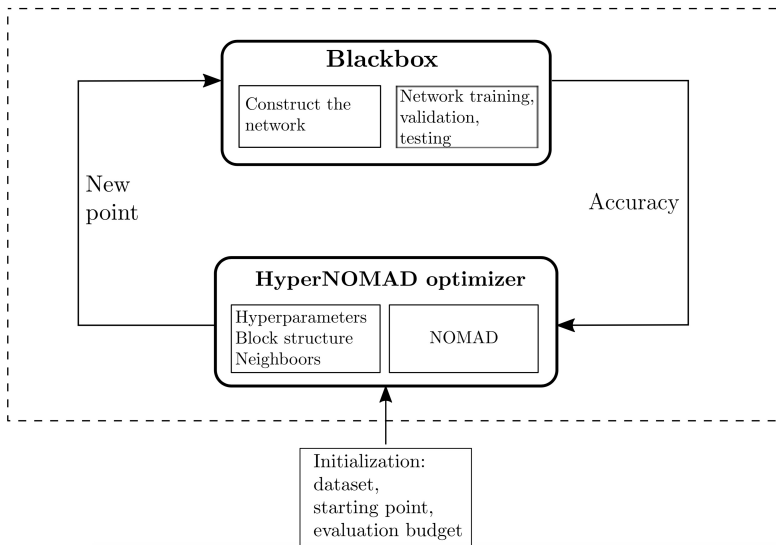



# HyperNOMAD

- ▶ HyperNOMAD is the interface between NOMAD and a deep learning platform
- ▶ Based on the [PyTorch](#) library
- ▶ Works with preexisting datasets such as MNIST or CIFAR-10, or on custom data
- ▶ Available at <https://github.com/bbopt/HyperNOMAD>
- ▶ We consider three types of hyperparameters:
  - ▶ Architecture of the neural network
  - ▶ Optimizer
  - ▶ Plus one for the size of mini-batches

## Hyperparameters for the architecture ( $5n_1 + n_2 + 4$ )

Hyperparameter	Type	Scope
Number of convolutional layers ( $n_1$ )	Categorical	[0;20]
Number of output channels	Integer	[0;50]
Kernel size	Integer	[0;10]
Stride	Integer	[1;3]
Padding	Integer	[0;2]
Do a pooling	Boolean	0 or 1
Number of full layers ( $n_2$ )	Categorical	[0;30]
Size of the full layer	Integer	[0;500]
Dropout rate	Real	[0;1]
Activation function	Categorical	ReLU, Sigmoid, Tanh

## Hyperparameters for the optimizer (5)

Optimizer	Hyperparameter	Type	Scope
Stochastic Gradient Descent (SGD)	Learning rate	Real	[0;1]
	Momentum	Real	[0;1]
	Dampening	Real	[0;1]
	Weight decay	Real	[0;1]
Adam	Learning rate	Real	[0;1]
	$\beta_1$	Real	[0;1]
	$\beta_2$	Real	[0;1]
	Weight decay	Real	[0;1]
Adagrad	Learning rate	Real	[0;1]
	Learning rate decay	Real	[0;1]
	Initial accumulator	Real	[0;1]
	Weight decay	Real	[0;1]
RMSProp	Learning rate	Real	[0;1]
	Momentum	Real	[0;1]
	$\alpha$	Real	[0;1]
	Weight decay	Real	[0;1]

## Blocks of hyperparameters

- ▶ **Convolution block:** 2 convolutional layers with (number of output channels, kernel size, stride, padding, pooling) = (16, 5, 1, 1, 0) and (7, 3, 1, 1, 1):

2	16	5	1	1	0	7	3	1	1	1
---	----	---	---	---	---	---	---	---	---	---

- ▶ **Fully connected block:** 3 fully connected layers with sizes of output = 1200, 512, 20:

3	1200	512	20
---	------	-----	----

- ▶ **Optimizer block:** SGD with learning rate = 0.1, momentum = 0.9, dampening =  $1e^{-4}$ , and weight decay = 0:


1	0.1	0.9	$1e^{-4}$	0
---	-----	-----	-----------	---

## Average results on MNIST



Algorithm	Avg accuracy on validation set	Avg accuracy on test set
Rand. search [Bergstra and Bengio, 2012]	94.02	89.07
SMAC [Hutter et al., 2011]	95.48	97.54
RBFOpt [Diaz et al., 2017]	95.66	97.93
<b>NOMAD</b>	<b>96.81</b>	<b>97.98</b>



## MNIST results with HyperNOMAD

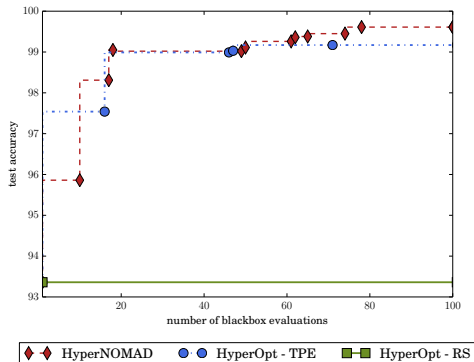


Comparison between HyperNOMAD, TPE and RS when launched from the default starting point of HyperNOMAD, on the MNIST data set. Best solution with HyperNOMAD: 99.61%

## Results on CIFAR-10 (vs Hyperopt)

- ▶ Training with 40,000 images, validation/test on 10,000 images
- ▶ One evaluation (training+test)  $\simeq$  2 hours (i7-6700@3.4 GHz, GeForce GTX 1070)

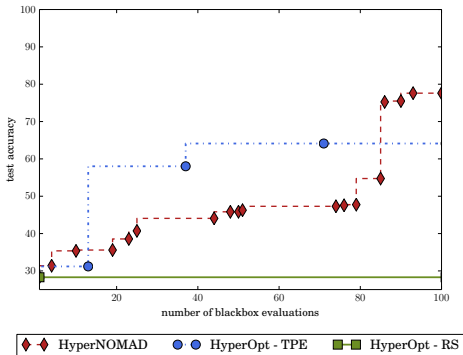

(a) Default starting point

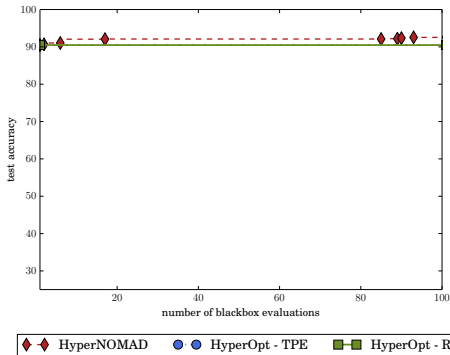

(b) From a VGG architecture

## Summary

- ▶ **Blackbox optimization** motivated by industrial applications
- ▶ Algorithmic features backed by mathematical **convergence analyses** and published in **optimization journals**
- ▶ **NOMAD**: Software package implementing **MADS**
- ▶ Open source; **LGPL** license
- ▶ **Features**: Constraints, biobjective, global optimization, surrogates, several types of variables, parallelism
- ▶ **HyperNOMAD**: Library for the HPO problem.
- ▶ **Fast support** at [nomad@gerad.ca](mailto:nomad@gerad.ca)
- ▶ NOMAD has become a **baseline** for benchmarking DFO algorithms



## Introduction

## The MADS algorithm

## The NOMAD software package

## Example: Hyperparameters Optimization

## References

## References I



Abramson, M. (2004).

Mixed Variable Optimization of a Load-Bearing Thermal Insulation System Using a Filter Pattern Search Algorithm.  
*Optimization and Engineering*, 5(2):157–177.



Alarie, S., Audet, C., Bouchet, P.-Y., and Le Digabel, S. (2019).

Optimization of noisy blackboxes with adaptive precision.  
Technical Report G-2019-84, Les cahiers du GERAD.



Audet, C., Béchard, V., and Le Digabel, S. (2008a).

Nonsmooth optimization through Mesh Adaptive Direct Search and Variable Neighborhood Search.  
*Journal of Global Optimization*, 41(2):299–318.



Audet, C. and Dennis, Jr., J. (2006).

Mesh Adaptive Direct Search Algorithms for Constrained Optimization.  
*SIAM Journal on Optimization*, 17(1):188–217.



Audet, C. and Dennis, Jr., J. (2009).

A Progressive Barrier for Derivative-Free Nonlinear Programming.  
*SIAM Journal on Optimization*, 20(1):445–472.



Audet, C., Dennis, Jr., J., and Le Digabel, S. (2008b).

Parallel Space Decomposition of the Mesh Adaptive Direct Search Algorithm.  
*SIAM Journal on Optimization*, 19(3):1150–1170.



Audet, C., Dennis, Jr., J., and Le Digabel, S. (2012).

Trade-off studies in blackbox optimization.  
*Optimization Methods and Software*, 27(4–5):613–624.

## References II



Audet, C., Dzahini, K., Kokkolaras, M., and Le Digabel, S. (2021a).  
Stochastic mesh adaptive direct search for blackbox optimization using probabilistic estimates.  
*Computational Optimization and Applications*, 79(1):1–34.



Audet, C. and Hare, W. (2017).  
*Derivative-Free and Blackbox Optimization*.  
Springer Series in Operations Research and Financial Engineering. Springer, Cham, Switzerland.



Audet, C., Le Digabel, S., Rochon Montplaisir, V., and Tribes, C. (2021b).  
NOMAD version 4: Nonlinear optimization with the MADS algorithm.  
Technical Report G-2021-23, Les cahiers du GERAD.



Audet, C., Le Digabel, S., and Tribes, C. (2019).  
The Mesh Adaptive Direct Search Algorithm for Granular and Discrete Variables.  
*SIAM Journal on Optimization*, 29(2):1164–1189.



Audet, C., Savard, G., and Zghal, W. (2008c).  
Multiobjective Optimization Through a Series of Single-Objective Formulations.  
*SIAM Journal on Optimization*, 19(1):188–210.



Bergstra, J. and Bengio, Y. (2012).  
Random search for hyper-parameter optimization.  
*Journal of Machine Learning Research*, 13:281–305.



Diaz, G., Fokoue, A., Nannicini, G., and Samulowitz, H. (2017).  
An effective algorithm for hyperparameter optimization of neural networks.  
*IBM Journal of Research and Development*, 61(4):9:1–9:11.

## References III



Hutter, F., Hoos, H. H., and Leyton-Brown, K. (2011).  
Sequential model-based optimization for general algorithm configuration.  
*In International Conference on Learning and Intelligent Optimization*, pages 507–523. Springer.



Lakhmiri, D., Le Digabel, S., and Tribes, C. (2021).  
HyperNOMAD: Hyperparameter optimization of deep neural networks using mesh adaptive direct search.  
Technical Report G-2019-46, Les cahiers du GERAD.  
To appear in *ACM Transactions on Mathematical Software*.



Le Digabel, S. (2011).  
Algorithm 909: NOMAD: Nonlinear Optimization with the MADS algorithm.  
*ACM Transactions on Mathematical Software*, 37(4):44:1–44:15.



Le Digabel, S., Abramson, M., Audet, C., and Dennis, Jr., J. (2010).  
Parallel Versions of the MADS Algorithm for Black-Box Optimization.  
*In Optimization days*, Montréal. GERAD.  
Slides available at [https://www.gerad.ca/Sebastien.Le.Digabel/talks/2010\\_JOPT\\_25mins.pdf](https://www.gerad.ca/Sebastien.Le.Digabel/talks/2010_JOPT_25mins.pdf).



Talgorn, B., Le Digabel, S., and Kokkolaras, M. (2015).  
Statistical Surrogate Formulations for Simulation-Based Design Optimization.  
*Journal of Mechanical Design*, 137(2):021405–1–021405–18.